

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C08F 20/58, C07C 237/22, 233/49, C08F 2/50	A1	(11) International Publication Number: WO 95/10552 (43) International Publication Date: 20 April 1995 (20.04.95)
(21) International Application Number: PCT/US94/10620 (22) International Filing Date: 16 September 1994 (16.09.94) (30) Priority Data: 08/136,576 13 October 1993 (13.10.93) US (71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (72) Inventors: BABU, Gaddam, N.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). HEILMANN, Steven, M.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). SMITH, Howell, K., II; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). WINSLOW, Louis, E.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (74) Agents: SHERMAN, Lorraine, R. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).		(81) Designated States: BR, CA, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: ACRYLAMIDO FUNCTIONAL DISUBSTITUTED ACETYL ARYL KETONE PHOTOINITIATORS		
(57) Abstract <p>The invention provides novel acrylamide functional disubstituted acetyl aryl ketones and a process for their preparation in high yields uncontaminated by difunctional material. The invention further provides photo-cross-linkable compositions comprising one or more ethylenically-unsaturated monomers and as photoinitiator the acrylamide functional disubstituted acetyl aryl ketone of the invention. The compositions are useful for the preparation of films and coatings, particularly pressure-sensitive adhesive coatings.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

5

**ACRYLAMIDO FUNCTIONAL DISUBSTITUTED ACETYL ARYL
KETONE PHOTOINITIATORS**

10

15 FIELD OF THE INVENTION

This invention relates to novel compounds useful as photoinitiators for the polymerization of free radically polymerizable ethylenically-unsaturated compounds. The invention further relates to
20 photoinitiators that are copolymerizable with ethylenically-unsaturated compounds and to polymerizable compositions containing the photoinitiators. The invention also relates to a process for the production of the photoinitiators. In
25 addition, the invention relates to pressure-sensitive adhesives and tape articles prepared using the photoinitiators of the invention.

BACKGROUND OF THE INVENTION

30 The use of photoinitiators to bring about the polymerization of free radically polymerizable compounds and compositions is well known and many photoinitiators are commercially available. The selection of a particular photoinitiator for use in a
35 composition is generally made on the basis of the solubility, rate of reaction, activating wavelength, and intended use of the photoinitiator (e.g., use as protective coatings, viscoelastic products, and the like).

40 Until recently, photoinitiators have been radiation sensitive compounds that, on exposure to

- 2 -

activating radiation of monomer compositions containing them, will in the absence of polyfunctional monomers in the composition induce polymerization of the monomers in a composition to essentially linear thermoplastic
5 polymers. Included among these initiators are acyloin and derivatives thereof, e.g., benzoin, benzoin methyl ether, benzoin ethyl ether, benzoin isopropyl ether, benzoin isobutyl ether, and α -methylbenzoin, organic sulfides, e.g., diphenyl sulfide, diphenyl disulfide,
10 decyl phenyl sulfide, and tetramethylthiuram monosulfide, S-acyl dithiocarbamates, e.g., S-benzoyl-N,N-dimethyldithiocarbamate, and α -substituted acetophenones, e.g. α,α -dimethyl- α -hydroxy acetophenone, α,α -diethoxy acetophenone. The initiator
15 is generally used in amounts ranging from about 0.01 to 5.0% by weight of the total polymerizable composition.

Photosensitive compounds are known that when incorporated into photopolymerizable compositions bring about the crosslinking of the composition with
20 attendant enhancement of the cohesive strength of the composition. Examples of these photoactive compounds include: sulfonyl halides, such as β -naphthalene sulfonyl chloride; halogenated aromatic compounds, such as α -chloromethylnaphthalene; and trichloromethyl-s-
25 triazines, such as 2,4-bis(trichloromethyl)-6-(4-methoxystyryl)-s-triazine. These photosensitive compounds, although very effective for use in the polymerization and photocrosslinking of monomer containing compositions liberate hydrogen chloride as a
30 by-product, following hydrogen abstraction by chlorine radicals which are responsible for initiating the polymerization and crosslinking. The corrosiveness of the liberated hydrogen chloride makes these photosensitive crosslinkers unsatisfactory for some
35 purposes.

Photosensitive compounds that can bring about the crosslinking of monomer containing compositions without


- 3 -

the liberation of hydrogen chloride are disclosed in European Patent Application No. 0 281 941. In this application, coreactive photoinitiators are disclosed that have the general formula:


5



in which IN denotes a photoinitiator structure, A denotes a spacer group, and RG denotes a functional
10 group. This extremely broad Formula I includes acryloyloxy functional photosensitive compounds and acrylamidoacyl functional photosensitive compounds such as



2-propenoic acid, 2-[4-(2-hydroxy-2-
15 methylpropanoyl)phenoxy]ethyl ester II, also called 2-hydroxy-1-[4-(2-acryloyloxyethoxy)phenyl]-2-methyl-1-propanone) and



2-propenoylaminoethanoic acid, 2-[4-(2-hydroxy-2-methylpropanoyl)phenoxy]ethyl ester, III.

20 Acryloyloxy functional photosensitive compound II is also disclosed in RADCURE '86, Conf. Proc., 10th, 4/43-4/55 (September 8-11, 1986); and its preparation in U.S. Patent No. 4,922,004, among other patents in which it is taught that Compound II is prepared in a
25 calculated 60% yield from 2-hydroxy-1-[4-(2-hydroxyethoxy)phenyl]-2-methyl-1-propanone (Irgacure™

- 4 -

2959, Ciba-Geigy, Chicago, IL) by reaction with acryloyl chloride.

Acrylamidoacetyl functional photosensitive compounds such as Compound III are included in the EP application 281,941 formula RG-A-IN only by proper combination of groups from among the many groups disclosed as useful in the formula; the formula discloses for spacer group "A" only unsubstituted (CH₂) units.

10 Japanese KOKAI Patent HEI 2[1990]-248482 describes a photocurable pressure sensitive adhesive (PSA) suitable for screen printing enabling a high rate of production of printed circuit boards using as photoinitiator 1-acryloyloxy-2-[4-(4-
15 chlorobenzoyl)benzoyloxy]ethane, a hydrogen abstracting photocrosslinker. Such a composition would yield an adhesive having a shear value of less than 100 minutes.

Japanese KOKAI Patent HEI 2[1990]-235908 discloses pressure sensitive adhesives by use of a composition of
20 ethylenically-unsaturated cleavage type photopolymerization initiator such as 2-hydroxy-1-[4-(2-acryloyloxyethoxy)phenyl]-2-methyl-1-propanone [Formula II], a conventional photopolymerization initiator and a polyfunctional crosslinking agent such as hexanediol
25 diacrylate. The PSA would have good shear primarily because of the conventional polyfunctional crosslinking agent. In the absence of such a conventional polyfunctional crosslinking agent the PSA would be expected to exhibit poor shear.

30

SUMMARY OF THE INVENTION

The present invention provides novel acrylamide functional disubstituted acetyl aryl ketones useful as photoinitiators which in polymerizable ethylenically
35 unsaturated compositions, preferably acrylic compositions such as pressure-sensitive adhesive compositions, are more hydrolytically stable and have a

- 5 -

higher rate of free radical homopropagation than that of corresponding acryloyloxy functional photoinitiators. In addition, use of these photoinitiators results in compositions possessing
5 excellent shear strength whether polymerized in the presence or absence of conventional polyfunctional crosslinkers.

The invention also provides a process for the preparation of the acrylamide functional disubstituted
10 acetyl aryl ketones in greater than 70% theoretical yield comprising the steps of (a) providing a hydroxyl, thiol, or primary amine functional aryl ketone and (b) reacting the hydroxyl, thiol, or primary amine functional aryl ketone with an alkenyl azlactone.

15 The invention further provides photocrosslinkable compositions comprising (a) one or more photopolymerizable ethylenically-unsaturated compounds, (b) an acrylamide functional disubstituted acetyl aryl ketone photoinitiator, and (c) optionally, a
20 photoinitiator not having an ethylenically unsaturated functional group. These compositions provide "PSAs" with higher molecular weights between crosslinks than conventional crosslinked PSAs. The photocrosslinkable and photocrosslinked compositions provide pressure-
25 sensitive adhesives which can be used in tape and laminate constructions.

The invention also provides pressure-sensitive adhesives and products prepared therefrom comprising the polymerization product of the acrylamide functional
30 disubstituted acetyl aryl ketone photoinitiator, at least one acrylic acid ester of a monohydric alcohol having an average of 4 to 12 carbon atoms, and at least one ethylenically unsaturated monomer whose homopolymer has a glass transition temperature greater than 50°C.

35 In this application:

"acrylamido" and "acrylamide" are used interchangeably;

- 6 -

"alkyl" means the monovalent group remaining after removal of a hydrogen atom from a linear, cyclic, or branched chain hydrocarbon containing 1 to 20 carbon atoms;

5 "lower alkyl" or "lower alkoxy" means C₁ to C₆ alkyl or alkoxy;

"aryl" means the monovalent group remaining after removal of one hydrogen atom from an aromatic hydrocarbon having 6 to 12 carbon atoms and optionally
10 up to 3 heteroatoms selected from S, N, and nonperoxidic O, and includes substituted aromatic compounds in which the substituents can be up to three groups selected from lower alkyl (C₁ to C₆) and lower alkoxy (C₁ to C₆) groups;

15 "acrylamido functional disubstituted acetyl aryl ketone compounds" mean any of 2-(N-acrylamido)-2,2-disubstituted acetoxy-functional aryl ketones, 2-(N-acrylamido)-2,2-disubstituted thiolacetoxy-functional aryl ketones, 2-(N-acrylamido)-2,2-disubstituted
20 acetamido-functional aryl ketones;

"arenyl" means the monovalent residue remaining after the removal of a hydrogen atom from an aromatic hydrocarbon containing both alkyl and aryl groups;

"arylene" means the divalent group remaining after
25 removal of two hydrogens from an aromatic hydrocarbon having 6 to 12 carbon atoms and optionally up to 3 heteroatoms selected from S, N, and nonperoxidic O, and includes substituted aromatic compounds in which the substituents can be up to three groups selected from
30 lower alkyl and lower alkoxy groups;

"acryl", "acryloyl", "acryloyloxy", "acrylamido", and "acrylamidoacyl" are intended to include also the corresponding "methacryl", "methacryloyl", "methacryloyloxy", "methacrylamido" and
35 "methacrylamidoacyl";

"disubstituted acetyl" means an acetyl group in which the carbon atom between the amide and carbonyl

- 7 -

groups is substituted by two alkyl groups or by one alkyl group and one aryl group;

"group" means a chemical species that allows for substitution or which may be substituted by conventional substituents which do not interfere with the desired product, e.g., substituents can be alkoxy, phenyl, halo (F, Cl, Br, I), cyano, nitro, etc.


The novel ketones contain ethylenically unsaturated substituents such that they participate directly in the polymerization reaction and their residues become incorporated into the polymer structure, which then retains the photoinitiating properties.

No art of which Applicants are aware disclose acrylamidoacetyl functional photoinitiators, which in acrylic pressure-sensitive adhesive compositions have a higher rate of free radical propagation than that of the corresponding acryloyloxy functional photoinitiators.

20

DETAILED DESCRIPTION

The novel acrylamide functional disubstituted acetyl aryl ketones of the invention have the general formula IV



25 wherein

R^1 is hydrogen or methyl;


R^2 and R^3 are independently an alkyl group of 1 to 14 carbon atoms, a cycloalkyl group of 3 to 14 carbon atoms, an aryl group of 5 to 12 ring atoms, an arenyl group having 6 to 16 carbon atoms and up to 3 heteroatoms selected from S, N, and nonperoxidic O, or R^2 and R^3

30


- 8 -

taken together with the carbon atom to which they are joined form a carbocyclic ring of 4 to 12 ring atoms;

5 W is -X- or a divalent connecting group joining the carbonyl group of the acrylamidoacetyl functional group to a photosensitive aryl ketone group, P; W is preferably selected from the class of connecting groups consisting of

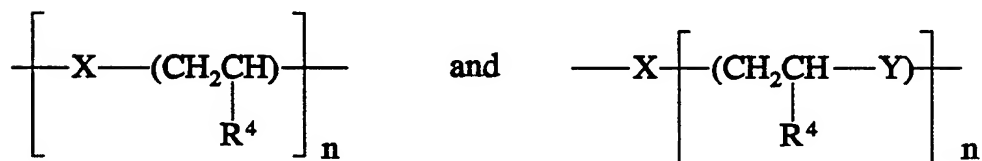

10 in which n is a number having a value of one to four, R⁴ is hydrogen or methyl group, X is -O-, -S-, or -NH-, and Y is

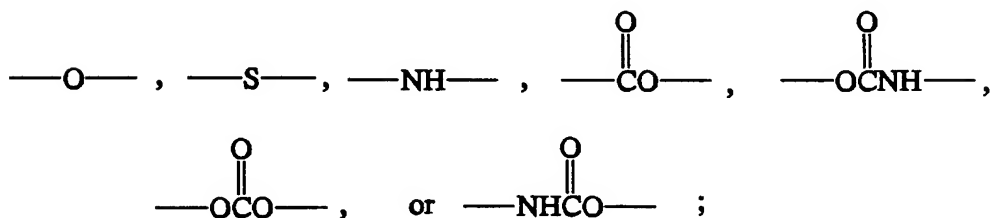


P can be a radiation sensitive aryl ketone group capable of Norrish Type I cleavage. (Basic photochemistry of aryl ketones is discussed in a text by J. G. Calvert and J. N. Pitts, Jr., "Photochemistry", John Wiley & Sons, Inc., New York (1966) pp 377-389.) Preferably P is selected from radiation sensitive groups having the formula:

15

20

- 9 -



in which

Ar is an arylene group having 6 to 12 carbon atoms that can be substituted by a lower alkyl

5 group having one to six carbon atoms, Ar preferably is selected from phenylene, naphthalenylene, and biphenylene; and

R⁵ is selected from the group consisting of hydrogen, C₁ to C₁₂ alkyl groups, C₁ to C₁₂ alkoxy groups, and phenyl groups;

10 R⁶, R⁷, and R⁸ independently are selected from the group consisting of hydroxyl, C₁ to C₁₂ alkyl groups, C₁ to C₁₂ alkoxy groups, di(C₁ to C₁₂) amino groups, and aryl groups, provided that at least one of R⁶, R⁷ and R⁸ is selected from the group consisting of hydroxyl, C₁ to C₁₂ alkoxy groups, or C₁ to C₁₂ amino groups, or that any two of R⁶, R⁷, and R⁸ together can be an alkylene group, -(C_p H_{2p})-, or an alkylene-dioxy group, -O-(C_p H_{2p})-O-, in which p is an integer having a value of two or three, that together with the carbon atoms to which they are attached to form a 5- or 6-membered ring, or any two of R⁶, R⁷, and R⁸ taken together with the carbon atom to which they are attached can form a carbonyl

20 group, $\begin{array}{c} \text{O} \\ \parallel \\ \text{---C---} \end{array}$, provided that the remaining R⁶, R⁷, or R⁸ is selected from the group consisting of hydroxyl, C₁ to C₁₂ alkoxy

25


30

- 10 -


groups, C₁ to C₁₂ amino groups, and aryl groups.

Examples of acrylamido functional disubstituted acetyl aryl ketone photoinitiators of Formula IV 5 according to the invention include:

1.

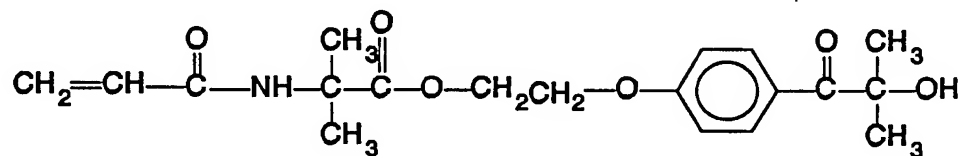


2.

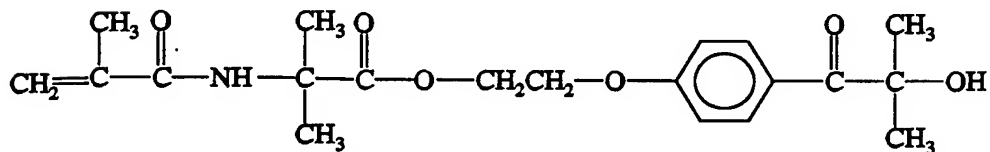


10

3.

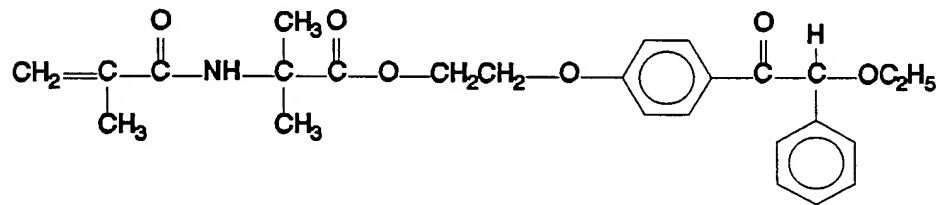


- 11 -


4.

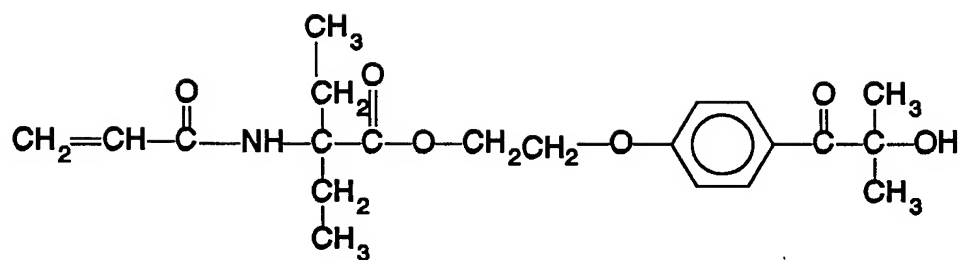


5.

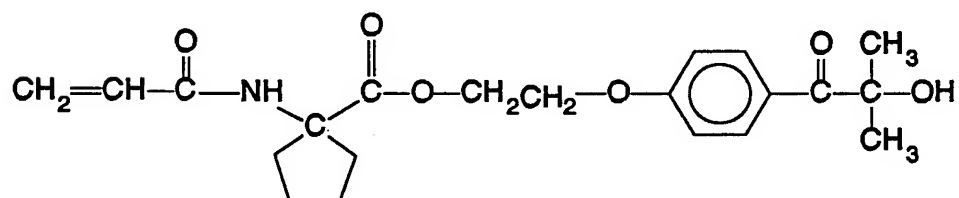

5 6.

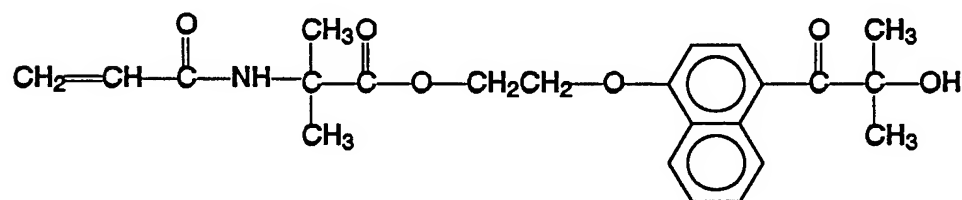


7.

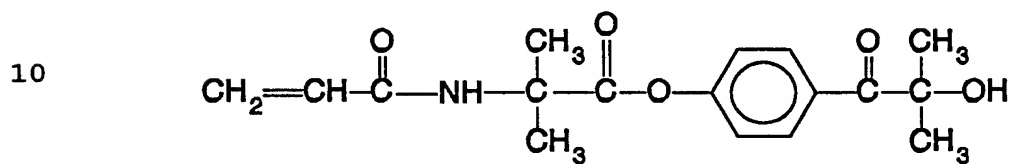


15

- 12 -

8.

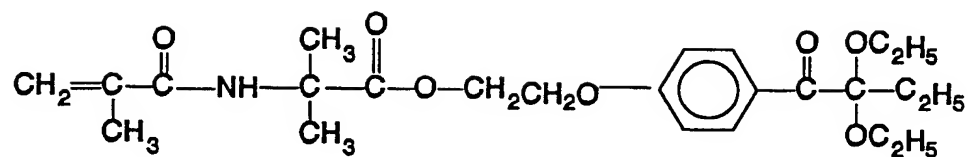


9.

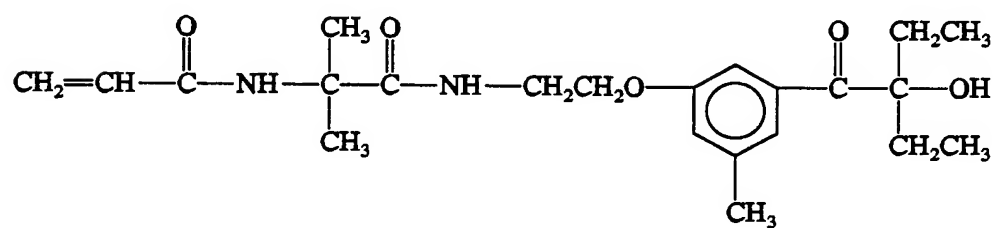


5

10.

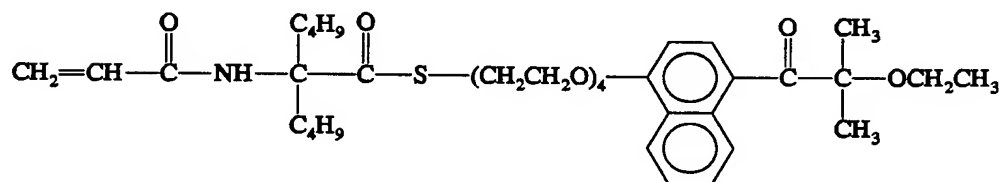


10 11.

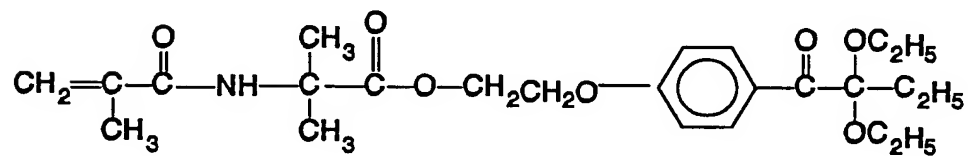


- 13 -

12.




13.



5


The acrylamido functional disubstituted acetyl aryl ketone photoinitiators of the invention preferably are prepared by reaction of a hydroxy, thiol, or amine functional aryl photoinitiator having the formula H-W-P, wherein W and P are as previously defined, with an equivalent amount of a 4,4-disubstituted alkenyl azlactone in accordance with the reaction scheme:

- 14 -

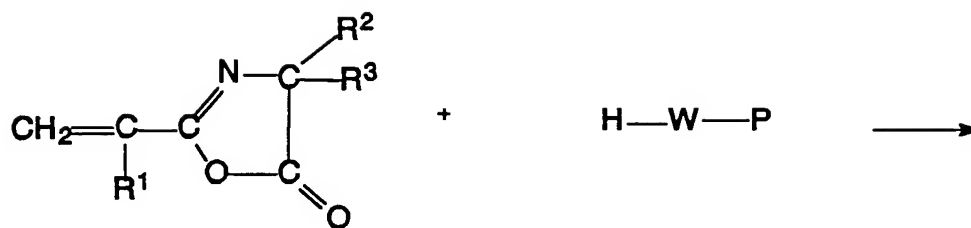

Alkenyl azlactone
(Formula V)

Hydroxyl, thiol, or amine
functional aryl ketone
(Formula VI)

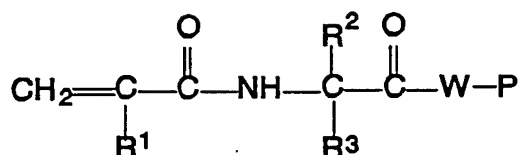


Acrylamido functional disubstituted
acetyl aryl ketone photoinitiator
(Formula VII)

wherein R^1 , R^2 , R^3 , W, and P are the same as defined above.

- 5 One class of the acrylamide functional disubstituted acetyl aryl ketones is prepared by the reaction of an azlactone with a hydroxy, thio, or amine functional aryl ketone according to the reaction scheme:

10

- 15 -

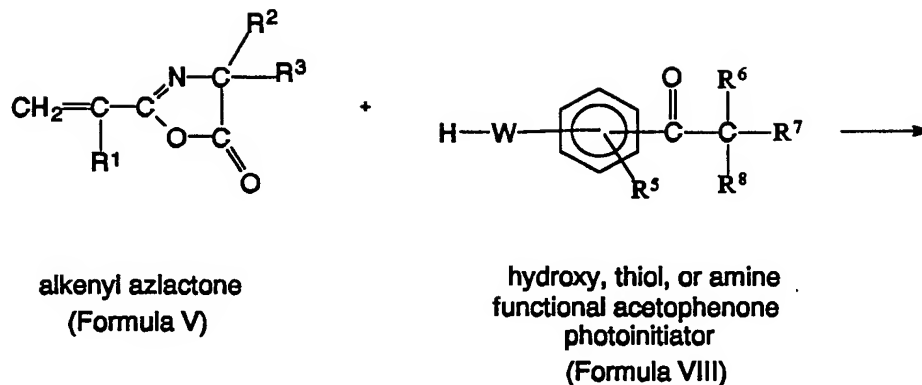

wherein R^1 , R^2 , R^3 , R^5 , R^6 , R^7 , R^8 , and W are the same as defined above.

The reaction of the alkenyl azlactone with the hydroxy, thiol, or amine functional aryl ketone is preferably carried out in the presence of an effective amount of a catalyst selected from:

- (a) bicyclic amidines such as, for example, 1,5-diazabicyclo[4.3.0]non-5-ene (DBN), 1,8-diazabicyclo[5.4.0]undec-7-ene (DBU), and 1,5,7-triazabicyclo[4.4.0]dec-5-ene (TBD). Additional information relating to these compounds is given in U.S. Patent No. 4,874,822, and
- (b) compounds comprising trivalent phosphorous, such as trimethylphosphine, triethylphosphine, tributylphosphine,

- 16 -

trioctylphosphine,
tris(dimethylamino)phosphine,
dimethylphenylphosphine, diphenylmethyl-
phosphine, 1,2-bis(di-n-propyl-
5 phosphino)ethane, 1,3-
bis(diphenylphosphino)propane,
diethylmethoxyphosphine, and
triphenylphosphine.

The amount of the initiator utilized in the
10 instant process may vary from about 0.05 mole percent
(based on alkenyl azlactone) to about 10 mole percent
or more. In most cases, however, 0.5 to 5 mole percent
are sufficient to provide a reasonable reaction rate.

Alkenyl azlactones of Formula V of use in the
15 preparation of the photoinitiators of the invention are
well known in the art, and include: 4,4-dimethyl-2-
ethenyl-2-oxazolin-5-one (also known as 2-vinyl-4,4-
dimethylazlactone), 4,4-dimethyl-2-isopropenyl-2-
oxazolin-5-one, 2-ethenyl-4-methyl-4-phenyl-2-oxazolin-
20 5-one, 2-ethenyl-4,4-pentamethylene-2-oxazolin-5-one,
4,4-diphenyl-2-isopropenyl-2-oxazolin-5-one, and 2-
ethenyl-4-ethyl-4-methyl-2-oxazolin-5-one. Others are
disclosed in assignee's U.S. Patent No. 4,777,276, and
in U.S. Patent No. 4,304,705.

25 The hydroxy, thiol, and amine functional aryl
ketones of Formula VI from which the acrylamidoacetyl
functional ketones of the invention can be prepared by
methods known to those in the art such as are described
in Krepski, et al., Tetrahedron Letters 24, (38) pp
30 4075-4078 (1983). Some of the aryl photoinitiators of
Formula VI are available commercially, such as 2-
hydroxy-1-[4-(2-hydroxyethoxy)phenyl]-2-methyl-1-
propanone (available as Irgacure™ 2959 from Ciba-Geigy,
Chicago, IL).

35 The preferred conditions for carrying out the
process of the invention are to mix the reactants and
catalyst in the absence of solvent and to allow the

- 17 -

reaction to proceed at room temperature (about 22°C). These conditions, however, may be modified in certain instances as is clear to one skilled in the art. For example, reaction temperatures below (in the case of
5 exothermic reactions) or above room temperature (for very slow reactions or in the case of solid reactants) may be advantageous. In general, reaction temperatures from about 0°C to about 100°C or so may be utilized to carry out the process of the instant invention. Also,
10 in certain cases nonreactive solvents or diluents may be utilized to facilitate or mediate the reaction. By "nonreactive" is meant that the solvents do not contain functional groups which can react with either the azlactone, the hydroxy, thiol, or amine functional
15 molecule, or the catalyst under the conditions utilized. Suitable nonreactive organic solvents include, for example, ethyl acetate, toluene, xylene, acetone, methyl ethyl ketone, acetonitrile, tetrahydrofuran, hexane, heptane, dimethylformamide,
20 dimethylacetamide, and the like, or combinations thereof. In many instances, it may also be advantageous to add an effective amount of an antioxidant or free radical inhibitor (e.g. 0.00005 to 5.0 weight percent based on the combined weight of
25 azlactone and hydroxy, thiol, or amine functional photoinitiator) such as a hindered phenol, to the reaction mixture or the final acrylamide functional product.

While in most instances it may be preferable to
30 carry out the process of the invention so as to have a 1:1 stoichiometric balance of alkenyl azlactone to hydroxy, thiol, or amine functional groups, thus converting all of these groups into acrylamide groups, it is also considered to be within the scope of the
35 invention to utilize more or less (e.g. from 50 to 150 mole %) than an equivalent amount of azlactone based upon the hydroxy, thiol, or amine equivalent weight.

- 18 -

As should be obvious to one skilled in the art, the reaction time required to convert the hydroxy, thiol, or amine functional compounds of Formula VI to the acrylamido functional disubstituted acetyl aryl ketones of Formula IV will vary widely. Reaction times will depend upon several factors, including the nature of the functional group of Formula VI, the substituents of the azlactone, the type of catalyst used, the amount of catalyst, the concentration of reactants and the temperature of the reaction. Progress of the reaction of the alkenyl azlactone with the hydroxy, thiol or amine functional molecule is readily monitored by infrared spectroscopy by following the disappearance of the azlactone carbonyl stretching absorption near 1800 cm^{-1} (about 5.5 micrometers). The absence of competing side reactions and estimation of acrylamide equivalent weights may be determined conveniently by ^1H -NMR analysis.

The photopolymerizable compositions of the invention comprise one or more photopolymerizable ethylenically unsaturated monomers and the acrylamido functional disubstituted acetyl aryl ketone photoinitiators. The compositions are useful for the preparation of films and coatings for use on various substrates including paper, plastics, wood, metal, glass and ceramics. Suitable photopolymerizable monomers for use in the compositions are selected from any of the free radically polymerizable ethylenically-unsaturated monomers, examples of which include one or more of the vinyl aromatic monomers such as styrene, α -methylstyrene, 2- and 4-vinyl pyridine, and the like; α,β -unsaturated carboxylic acids and their derivatives such as acrylic acid, methacrylic acid, itaconic acid, maleic acid, fumaric acid, crotonic acid, methyl methacrylate, butyl methacrylate, 2-ethylhexyl methacrylate, ethyl acrylate, butyl acrylate, iso-octyl acrylate, octadecyl acrylate, cyclohexyl acrylate,

- 19 -

tetrahydrofurfuryl methacrylate, phenyl acrylate, phenethyl acrylate, benzyl methacrylate, β -cyanoethyl acrylate, maleic anhydride, diethyl itaconate, acrylamide, methacrylonitrile, N-butylacrylamide, and
5 the like; vinyl esters of carboxylic acids such as vinyl acetate, vinyl 2-ethylhexanoate, and the like; vinyl halides such as vinyl chloride, vinylidene chloride, and the like; vinyl ethers such as ethyl vinyl ether, butyl vinyl ether, 2-ethylhexyl vinyl
10 ether, and the like; N-vinyl compounds such as N-vinylpyrrolidone, N-vinylcarbazole, and the like; vinyl ketones such as methyl vinyl ketone and the like; and vinyl aldehydes such as acrolein, methacrolein, and the like; hydroxy functional vinyl monomers such as 2-
15 hydroxyethyl acrylate, 2-hydroxyethyl methacrylate, 2-hydroxyethyl acrylamide, 2-hydroxyethyl maleimide, 4-hydroxybutyl vinyl ether, glycerol monoacrylate or methacrylate, and diethyleneglycol monomethacrylate.

Polyunsaturated monomers can also be used to
20 provide additional cohesive strength, if desired, in the acrylamide functional disubstituted acetyl aryl photoinitiator-containing compositions of the invention such as polyfunctional acrylates, for example, ethylene glycol diacrylate, 1,6-hexanediol diacrylate,
25 propoxylated bisphenol A diacrylate and dimethacrylate, trimethylolpropane triacrylate and pentaerythritol triacrylate. Also useful in the compositions are unsaturated oligomers and polymers including, for example, acrylated polyesters, polyethers, and silicone
30 polymers. A preferred polyunsaturated monomer is hexanediol diacrylate. Copolymerizable polyunsaturated monomers can be present in the polymerizable composition in the range of 0 to 5.0 pbw (parts by weight), preferably 0.01 to 5.0 pbw, more preferably
35 0.01 to 2.0 pbw, and most preferably 0.01 to 0.5 pbw.

In preferred crosslinkable compositions of the invention, the use of as little as 0.05 part by weight

- 20 -

of polyunsaturated monomer will reduce the amount of acrylamide functional disubstituted acetyl aryl photoinitiator required to obtain high shear values to no more than about 0.05 part by weight.

5 The photopolymerizable compositions of the invention can be stabilized by adding known thermal inhibitors and antioxidants, such as, for example, hydroquinone or hydroquinone derivatives, pyrogallol, thiophenols, nitro compounds, or β -naphthols, in the
10 customary amounts without significantly impairing the initiating action of the photoinitiators according to the invention. The main purpose of such additions is to prevent premature polymerization during the preparation of the systems.

15 Depending on its intended use, the composition of the invention can contain, for example, plasticizers, viscosifiers, flattening agents, bacteriocides, fillers, lubricants, surfactants, pigments, dyes, and other agents. The amounts of these materials used is
20 selected to provide the characteristics desired in the final cured composition. The amounts to be added vary with the intended use.


 The acrylamide functional disubstituted acetyl aryl ketone photoinitiator and ethylenically-
25 unsaturated monomers of the invention can be homopolymerized or they can be copolymerized to linear products that can be crosslinked by exposure to actinic radiation. By the term "actinic radiation" is meant radiation having wavelengths in the 200 to 600 nm
30 range, preferably 280 to 450 nm, and more preferably 300-450 nm. Suitable sources include sunlight, carbon arcs, mercury vapor arcs, black light lamps, fluorescent lamps, argon and xenon glow lamps, electronic flash units and flood lamps. Particularly
35 useful intensities include those in the range of 0.1 to 150 mW/cm², preferably in the range of 0.5 to 100 mW/cm² and more preferably in the range of 0.5 to 50 mW/cm².

- 21 -

Depending on the concentration of photoinitiator, the particular acrylamide functional disubstituted acetyl aryl ketone photoinitiator and the depth of the composition, exposures necessary to polymerize (which
 5 term includes polymerize and crosslink) the composition range from about 1 second or less to about 10 minutes or longer.

In a first process, ethylenically unsaturated monomers and the novel photoinitiator(s) of the
 10 invention and preferably a conventional photoinitiator (such as those disclosed in the Background of the Invention, preferably Irgacure 2959 (Ciba-Geigy)) can be partially polymerized to provide a syrup having a coatable viscosity. Such a syrup comprises a linear
 15 polymer having pendent photoinitiator groups. This can be accomplished by thermal techniques leading to linear polymer or by exposure to actinic radiation leading to branched polymer.

Such polymers can be used as polymeric
 20 photoinitiators and can have the general formula:

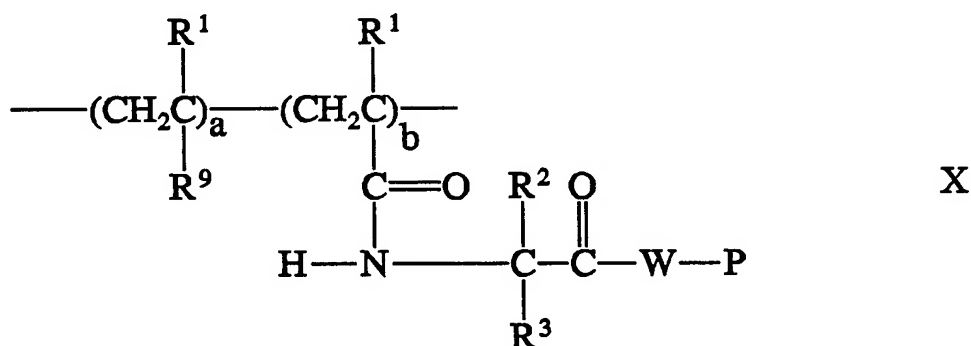

in which R^1 , R^2 , R^3 , W, and P are the same as defined above; R^9 is one or more organic groups as determined by the identity of the ethylenically-unsaturated
 25 monomers in the polymerizable composition, preferably R^9 is selected from alkoxy groups and alkoxy carbonyl

- 22 -

groups having 1 to 20 carbon atoms, aryl, and arenyl groups (where these groups are as previously defined), and a and b are each numbers having a value sufficient to provide to the linear polymer a number average molecular weight of from about 1000 to 5,000,000, the mole ratio, $b/(a+b)$, having a value from about 0.0001 to 0.5.

In a second process, it is possible to polymerize the monomer composition containing an ethylenically unsaturated monomer and the novel photoinitiator of the invention to a linear polymer having pendent photoinitiator groups. This can be accomplished by including in the composition a conventional source of free radicals that contains no copolymerizable group and is activated by heat or actinic radiation of a wavelength different from that of the acrylamide functional disubstituted acetyl aryl ketone photoinitiator.

A third process for the preparation of the polymeric photoinitiator of formula X comprises the steps of polymerizing an alkenyl azlactone of formula V with a copolymerizable ethylenically unsaturated monomer, and reacting the resulting copolymer with a hydroxy, thiol, or amino group-substituted photoinitiator of formula VI to provide the polymeric photoinitiator of formula X.

Such a polymer of formula X containing pendent photoinitiator groups, preferably having a T_g in the range of -70 to 150°C , can be added either to an acrylic syrup (partially polymerized material prepared from one or more acrylic monomers) or to at least one ethylenically unsaturated monomer to provide a composition polymerizable to a crosslinkable pressure-sensitive adhesive having desirable high performance properties.

The preferred photocrosslinkable composition of the invention comprises per 100 parts by weight (pbw):

- 23 -

(1) 60 to 99.95 pbw of one or more acrylic acid esters of monohydric aliphatic alcohols having an average of 4 to 12 carbon atoms;

(2) 0 to 39.95 pbw of ethylenically-unsaturated
5 monomers whose homopolymer has a glass transition temperature (T_g) greater than 50°C, and

(3) 0.01 to 10.0 pbw of acrylamide functional disubstituted acetyl aryl ketone photoinitiator,

(4) 0 to 5.0 pbw of a polyfunctional acrylate, and

10 (5) 0 to 5.0 pbw of a thermal or actinic radiation activated source of free radicals, the source being unsubstituted by ethylenic unsaturation.

A pressure-sensitive adhesive (PSA) is generally a component of a pressure-sensitive tape which in its
15 most simple configuration is comprised of the adhesive and a backing, and the overall construction is tacky and adherent at the use temperature (typically room temperature) and adheres to a variety of substrates using only moderate (typically fingertip) pressure to
20 form the bond. In this fashion, pressure-sensitive tapes constitute a complete, self-contained bonding system.

In the present invention, normally tacky and pressure-sensitive adhesive tapes represent a very
25 versatile family of products, performing such diverse functions as insulating, mounting, sealing, mending, holding, masking, labeling, binding, joining, laminating, protecting, and reinforcing. The tapes can be single or double coated (i.e., PSA on both surfaces
30 of a substrate) and can be applied to a substrate.

When coated on a flexible backing, the photocrosslinkable or photocrosslinked compositions can provide pressure-sensitive adhesive tapes having desirable hydrolytic stability. A layer of a
35 conventional release material can be included in the tape construction which can then be provided as a roll of pressure-sensitive adhesive tape. In addition, a

- 24 -

pressure-sensitive adhesive of the invention can be included between two substrates to provide a laminated construction. At least one of the substrates can be nonadhering or can be releasing to the PSA.

5

TEST METHODS

The following tests may be used to evaluate the adhesive tapes of the invention.

10

Static Shear Value

The adhesive films as described in the examples were cut into strips 1.27 cm in width and adhered by its adhesive to a flat, rigid stainless steel plate with exactly 1.27 cm length of tape in contact with the plate. Before testing, a 1000 g weight at 25° C was placed over the bonded area for 15 minutes. Then the plate with the adhered tape was placed either at room temperature (RT) or in an air-circulating oven which had been preheated to 70°C, and after 15 minutes a 500 g or 1000 g weight was hung from the free end of the tape, with the panel tilted 2° from the vertical to insure against any peeling forces. The time (in minutes) at which the weight fell was the "Static Shear RT (1000 g) or 70°C (500 g)". The test was discontinued at 10,000 minutes if there was no failure. In the Tables, this was designated as 10,000+ minutes.

25

Peel Adhesion

Peel adhesion was measured as in ASTM D-3330-78 except that the test tapes were 1.27 cm in width and were tested immediately after being adhered to a glass or stainless steel surface. Results were reported in Newtons per/decimeter (N/dm).

30

- 25 -

Percent Gel Test [ASTM D-3616-82]

The gel test was performed as described in U.S. Patent No. 5,112,882, col. 10, line 18 to col. 11, line 2.


5

The objects and advantages of the invention are further illustrated by the following examples, but the particular materials and amounts thereof recited in these examples, as well as other conditions and details, should not be construed to unduly limit this invention. Unless stated otherwise, all parts are parts by weight and all temperatures are degree centigrade.

15

EXAMPLES


Example 1. Preparation of the acrylamidoacetyl photoinitiator:

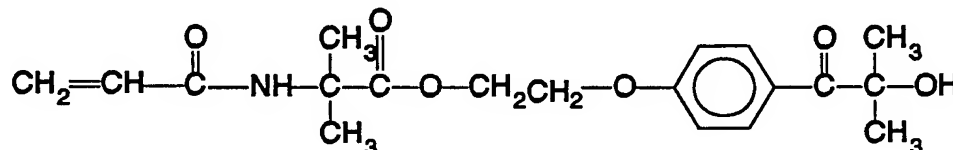

Compound No. 1

20

Into a 200 ml round bottom flask fitted with a magnetic stirrer were placed 22.4 g (0.1 mole) of




2-hydroxy-1-[4-(2-hydroxyethoxy)phenyl]-
2-methyl-1-propanone

25

- 26 -

(available as Irgacure™ 2959 from Ciba-Geigy), 14.2 g (0.102 mole) of 2-vinyl-4,4-dimethyl-2-oxazolin-5-one (VDM) (available from SNPE Inc., Princeton, NJ 08540), and 50 ml of amyl acetate. While stirring the mixture, 5 0.76 g of 1,8-diazabicyclo[5.4.0]undec-7-ene (DBU) (available from Aldrich Chemical Co., Milwaukee, WI) was added. Heat was evolved as the reaction components went into solution, and after complete solution was obtained, stirring was discontinued. The mixture was 10 allowed to cool to room temperature and the solid that had formed was collected by filtration. After drying the recovered solid in a vacuum oven at about 40° C, there was obtained 32.6 g of reaction product (89.8 % of theory). The material had a melting point of 84.5- 15 85.5°C (uncorrected). Elemental Analysis, Infrared Spectral Analysis, and ¹H and ¹³C Nuclear Magnetic Resonance confirmed that the material was the title compound.

20 Example 2. Preparation of the methacrylamidoacetyl photoinitiator

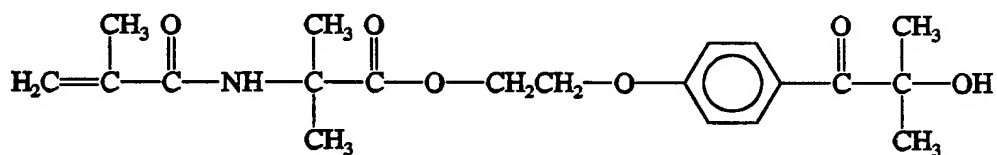

Compound No. 2


25

The procedure of example 1 was utilized except that 2-isopropenyl-4,4-dimethyl-2-oxazolin-5-one (IDM; prepared as described by Taylor, et al., J. Polym. Sci. Polym. Lett. Ed., 1971, 9, 187) was utilized instead of

- 27 -

VDM. The reaction was run on a 0.5 mole scale. After drying in a vacuum oven at about 40°C there was obtained 141.6 g of reaction product (75% of theory). The material had a melting point of 69-71°C (uncorrected). ¹H and ¹³C Nuclear Magnetic Resonance confirmed that the material was the title compound.

Example 3. Preparation of the acrylamidoacetyl photoinitiator:

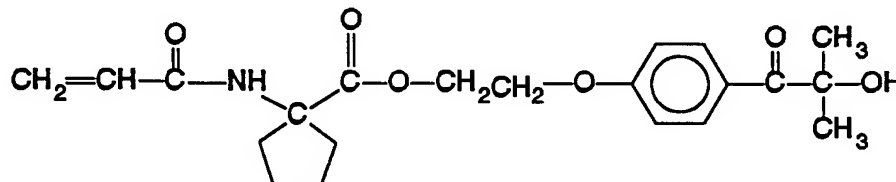

10

Compound No. 3

Step 1. Preparation of 2-ethenyl-4,4-pentamethylene-2-oxazolin-5-one

Into a 500 ml round bottom flask equipped with a reflux condenser and a magnetic stirrer were placed 9.15 g (0.05 mole) 1-acrylamidocyclopentane carboxylic acid (prepared by the method described by Heilmann et al., Synthetic Communications 17(7), 843-862(1987), 10.32 g (0.05 mole) of the dehydrating agent, N,N'-dicyclohexylcarbodiimide (available from Aldrich Chemical Co.) and 150 ml methylene chloride and the mixture was stirred for 18 hours. The resulting slurry was filtered to remove N,N'-dicyclohexylurea formed during the reaction, and the methylene chloride was removed under reduced pressure at room temperature. The azlactone obtained was used in Step 2 without further purification.

- 28 -

Step 2. Condensation of Product from Step 1 and Irgacure™ 2959


The procedure of Example 1 was repeated using

- a) the azlactone of Step 1,
- 5 b) 11.2g (0.05 mole) Irgacure™ 2959,
- c) 40 ml amyl acetate, and
- d) 5 drops of DBU.

There was obtained 17.5 g (90.0 % of theory) of the acrylamidoacetyl photoinitiator of the title. It
10 had an uncorrected melting point of 119-121°C. Infrared, Elemental, and ¹H and ¹³C Nuclear Magnetic Resonance (NMR) spectral analyses confirmed that the material was the title material, Compound No. 3.

15 Comparative Example 1.

Preparation of:

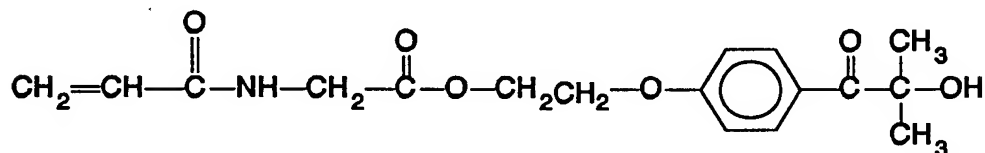

Comparative Compound A

Into a 500 ml flask fitted with a magnetic stirrer
20 and reflux condenser were placed 6.46g (0.05 mole) N-acryloylglycine (prepared according to the procedure of Kulkarni and Morawetz, J. Polymer Sci., 54, 491 (1961)), 10.75 g (0.048 mole) Irgacure 2959, 9.90 g (0.048 mole) N,N-dicyclohexylcarbodiimide, 150 ml
25 methylene chloride, and 0.57 g (0.005 mole) trifluoroacetic acid. The mixture was stirred at room temperature (about 22°C) for 75 hours. The solid that had collected was removed by filtration and the filtrate was concentrated under reduced pressure to an

- 29 -

oil. After standing at room temperature for 7 days the oil solidified. The solid was recrystallized from ethyl acetate and dried in a vacuum oven at 60°C. There was obtained 9.0 g (56.0 % of theory based on Irgacure 2959) showing an uncorrected melting point of 93-94°C. After a sample of this material was recrystallized from ethyl acetate/pentane, its uncorrected melting point was 94.5 - 95.5°C. Elemental analysis, ¹H and ¹³C NMR spectra confirmed that the material was that of the title compound.

Example 4: Preparation of isooctyl acrylate/acrylic acid, and acrylamidoacetyl photoinitiator (Compound 1) terpolymer (Polymer I):

Nine grams of (90/10 parts by weight) of isooctyl acrylate and acrylic acid, 1 gram of Compound 1, 100 grams of ethyl acetate, 0.1 gram of carbon tetrabromide (a chain transfer agent) and 0.1 gram of benzoyl peroxide were charged into a bottle. The bottle was purged with nitrogen for 10 minutes. The bottle was capped, placed in a water bath at 60°C and agitated for approximately 20-24 hours. The viscosity of the solution increased and the infrared spectrum of the polymer showed the disappearance of the vinyl monomer. The solvent was removed on a rotary evaporator. The mixture was precipitated in methanol and dried under vacuum to constant weight.

Example 5: Preparation of isobornyl acrylate/acrylic acid and acrylamidoacetyl photoinitiator (Compound 1) terpolymer (Polymer II)

Nine grams of (90/10 parts by weight) of isobornyl acrylate and acrylic acid, 1 gram of Compound 1, 100 grams of ethyl acetate, 0.1 part of carbon tetrabromide (a chain transfer agent) and 0.1 gram of benzoyl peroxide were charged into a bottle. The bottle was purged with nitrogen for 10 minutes, capped, placed in

- 30 -

a water bath at 60°C and agitated for approximately 20-24 hours. The viscosity of the solution increased and the infrared spectrum of the polymer showed the disappearance of the vinyl monomer. The solvent was removed on a rotary evaporator. The mixture was precipitated in methanol and dried under vacuum to constant weight.

Example 6. Preparation of copolymer of isooctyl acrylate-acrylamido functional initiator (Polymer III)

92.5 g of isooctyl acrylate and 7.5 g of vinylldimethylazlactone, 100 g of ethyl acetate, 0.1 g of carbon tetrabromide (a chain transfer agent) and 0.1 g of benzoyl peroxide were charged to a bottle. The bottle was purged with nitrogen for 10 minutes. The bottle was capped, placed in a water bath at 60°C and agitated for approximately 20-24 hours. The viscosity of the solution increased and the infrared spectrum of the polymer showed the disappearance of the carbon-carbon double bonds. The reaction bottle was charged with 11.97 grams of Irgacure™ 2959 and 0.7 g of 1,8-diazabicyclo[5.4.0]undec-7-ene. The reaction mixture was heated at 60°C under nitrogen. The progress of the reaction was followed by infrared spectroscopy. At the end of the reaction, the solvent was removed on a rotary evaporator. The mixture was stirred in methanol and the precipitated polymer having pendent photoinitiator groups was dried under vacuum to constant weight.

30

Example 7. Preparation of isobornyl acrylate-acrylamido functional initiator (Polymer IV)

92.5 g of isobornyl acrylate and 7.5 g of vinylldimethylazlactone, 100 g of ethyl acetate, 0.1 g of carbon tetrabromide (a chain transfer agent) and 0.1 g of benzoyl peroxide were charged to a bottle. The bottle was purged with nitrogen for 10 minutes.

- 31 -

The bottle was capped, placed in a water bath at 60°C and agitated for approximately 20-24 hours. The viscosity of the solution increased and the infrared spectrum of the polymer showed the disappearance of the carbon-carbon double bonds. The reaction bottle was charged with 11.97 grams of Irgacure™ 2959 and 0.7 g of 1,8-diazabicyclo[5.4.0]undec-7-ene. The reaction mixture was heated at 60°C under nitrogen. the progress of the reaction was followed by infrared spectroscopy. At the end of the reaction, the solvent was removed on a rotary evaporator. The mixture was stirred in methanol and the precipitated polymer having pendent photoinitiator groups was dried under vacuum to constant weight.

15

Example 8. Preparation of pressure-sensitive adhesives

A monomer mixture was prepared to contain:

90 pbw isooctyl acrylate (IOA)

10 pbw acrylic acid (AA)

20 0.04 pbw 2,2-dimethoxy-2-phenylacetophenone
(KB-1™) (available from Sartomer)

To portions of the monomer mixture was added 0.3 to 1.0% by weight of Compound No. 1, dimethyl substituted acrylamidoacetyl functional photoinitiator of Example 1 or 0.3 to 0.7% by weight of Comparative Compound A, the dihydroacrylamidoacetyl functional photoinitiator of the Comparative Example. Each portion was partially (5 to 10%) photopolymerized in bulk in an inert (nitrogen) atmosphere using a bank of 40-watt fluorescent blacklights to provide coatable syrups of a viscosity (Brookfield) of about 1500 cps.

Each coating syrup was knife-coated onto 40 μm poly(ethylene terephthalate) film (PET) at a thickness of 40 μm. The coating was exposed to a bank of blacklight bulbs (about 300-400 nm). The coating was exposed to an intensity of about 2.2 mW/cm² for about 2.0 minutes. Each coating received an irradiated dose

- 32 -

of about 250 mJ/cm². Properties of the various pressure-sensitive tapes are recorded in Table I.

5

TABLE I			
Photo-initiator	Wt%	Peel adhesion ^(a) N/dm	Shear holding 25°C ^(b) min.
Compound No. 1	0.3	80	5997
	0.7	66	6876
	1.0	66	10,000+
Comparative A	0.3	67	384
	0.4	66	2509
	0.7	66	4303

10

15

- (a) Peel adhesion was measured from glass at 180°C also using a 230 cm/minute peeling rate.
- (b) Shear holding values were determined employing (1/2" x 1/2") 1.27 cm x 1.27 cm areas of adhesive adhered to stainless steel plates and a suspending load of 1000g at 25°C.

25

It can be seen from the data in Table I that pressure-sensitive adhesives prepared using the photoinitiator of the invention, Compound No. 1, have peel adhesions in the same range as the peel adhesions of the adhesives prepared with dihydroacrylamidoacetyl photoinitiator, Comparative Compound A, and that the shear holding strengths of adhesives prepared using Compound No. 1 are greater than 10,000 minutes at 25°C while the shear holding strengths of adhesives prepared using Comparative Compound A are less than 4500 minutes at 25°.

30

35

- 33 -

Example 9: A series of pressure-sensitive adhesive tapes were made by first partially polymerizing a mixture of, by weight,

- 90 pbw of isooctyl acrylate
- 5 10 pbw of acrylic acid
- 1.30 pbw of Compound No. 1.

The partial photopolymerization was accomplished in an inert (nitrogen) atmosphere using a bank of 40-watt fluorescent blacklights to provide a coatable
10 syrup. The mixture was knife coated onto 40 μm poly(ethylene terephthalate) (PET) film to different thicknesses. The coating was exposed to a bank of blacklight bulbs. The coating was subjected to
15 different irradiated doses. The reaction conditions and properties of various pressure-sensitive tapes are recorded in Table II.

Table II

S. No.	Oxygen (ppm)	Energy (mJ/cm ²)	Thickness (μm)	Peel adh. (N/dm)	Shear (min.)	Gel (%)	Volatiles (%) (b)	I ^(a) mW/cm ²	Time sec.
1.	96	298	45	80	10,000+	86	0.77	2.65	111
2.	114	298	90	104	10,000+	86	1.15	2.65	111
3.	119	279	47	82	10,000+	83	0.62	2.65	104
4.	111	279	88	104	10,000+	88	1.22	2.65	104
5.	113	279	120	130	10,000+	87	1.01	2.65	104
6.	138	265	47	82	10,000+	83	0.92	2.65	99
7.	210	251	90	101	10,000+	88	1.14	2.65	93
8.	114	237	48	84	10,000+	77	0.85	2.65	89
9.	114	237	89	104	10,000+	88	1.34	2.65	89

Shear values were the average of three determinations measured at room temperature on 1.27 cm x 1.27 cm with 1 kg load at 25°C.

(a) I = intensity

(b) percent volatiles was gravimetrically determined after drying 3 hours at 120°C

- 35 -

The data in Table II show that increase in thickness of the adhesives gave increased peel adhesions. All adhesives of Table II gave 10,000+ shear values independent of oxygen concentration.

5

Example 10: Pressure-sensitive adhesive prepared using both the photoinitiator of the invention and a polyfunctional acrylate.

10 A monomer mixture was prepared to contain
90 pbw isooctyl acrylate (IOA)
10 pbw acrylic acid (AA)
0.04 pbw KB-1.

15 To portions of the monomer mixture, as shown in Table III, was added 0 to 0.5 pbw of Compound No. 1. Each portion was partially polymerized to a coating syrup as described in Example 8. To each syrup 0.16 pbw KB-1 and 0 to 0.3 pbw of hexanediol diacrylate (HDDA) were added, as shown in Table III and each syrup was coated and cured by irradiation as follows:

20 All of the PSAs were cured on solvent free silicone paper release liner in a nitrogen-rich environment (250 ppm oxygen). 125 μ m thick (5 mil) PSAs were cured with ultraviolet irradiation using 355 mJ/cm² of energy applied over 150 sec. Three average intensities for all samples of Table III were utilized (in order given): 1.0 mW/cm² for 50 sec., 2.1 mW/cm² for 95 sec., and 36 mW/cm² for 5 sec. Peel strength values were determined from stainless steel after it had been washed once with acetone and three times with a 50/50 isopropanol/water mixture. All peel strengths were determined using a 90° peel mode at 30.5 cm/minute. 1.27 cm wide samples with 125 μ m thick (5 mil) anodized aluminum backings were used for all of the testing. The static shear strength values were measured from stainless steel substrates cleaned once with acetone and three times with a 50/50 isopropanol/water mixture.
35 2.54 cm x 1.27 cm samples were prepared and a 1000 g load was used at room temperature and a 500 g load was used at

- 36 -

70°C. The time to bond failure was recorded. 125 μ m thick (5 mil) anodized aluminum backings were used for all of the static shear samples. The percent volatiles were gravimetrically determined after drying for three hours at
5 120°C.

- 37 -

Table III							
	Sample No.	Compd. No. 1 phr	HDDA phr	R.T. Shear min	70° Shear min	72 hr. Peel N/dm	Volatiles %
5	1	0.1	0	10,000+	712	149	0.88
	2	0.2	0	10,000+	10,000+	187	0.84
	3	0.3	0	10,000+	10,000+	175	0.80
	4	0.5	0	10,000+	10,000+	152	0.69
	5	0.8	0	10,000+	10,000+	152	0.80
10	6	1.1	0	5,329	10,000+	181	0.83
	7	0	0.02	10,000+	1,444	167	0.84
	8	0	0.05	7,676	97	168	0.85
	9	0	0.10	10,000+	126	169	0.83
	10	0	0.15	10,000+	432	171	0.97
15	17	0	0.20	10,000+	156	184	0.95
	12	0	0.25	10,000+	353	169	0.93
	13	0	0.30	10,000+	765	160	0.80
	14	0.01	0.02	8986	40	189	1.17
	15	0.01	0.05	10,000+	144	206	1.15
20	16	0.01	0.10	10,000+	107	183	1.14
	17	0.05	0.02	10,000+	380	167	0.80
	18	0.05	0.05	10,000+	10,000+	194	1.13
	19	0.05	0.10	10,000+	10,000+	199	1.04
	25	0.10	0.02	10,000+	10,000+	200	0.87
25	21	0.10	0.05	10,000+	10,000+	159	0.88
	22	0.10	0.10	10,000+	10,000+	166	0.74
	23	0.20	0.02	10,000+	10,000+	210	0.80
	24	0.20	0.05	10,000+	10,000+	152	0.75
	25	0.20	0.10	10,000+	10,000+	160	0.80
30	26	0.50	0.02	10,000+	10,000+	161	0.71
	27	0.50	0.05	10,000+	10,000+	178	0.74
	28	0.50	0.10	10,000+	10,000+	148	0.77

35 The data of Table III show that compositions containing 0.02 to 0.30 HDDA (Samples 7-13) and no Compound No. 1 did not provide adhesives having 70° shear values above 1,444 minutes. The data of Table III do show

- 38 -

that without HDDA, pressure-sensitive adhesives having 70° shear values of 10,000 minutes or more were not obtained with compositions containing 0.1 pbw or less of Compound No. 1 (Sample 1), however, with as little as 0.05 pbw of
 5 HDDA, compositions containing only 0.05 pbw of Compound No. 1 (Sample 18) gave an adhesive that had a 70° shear value of greater than 10,000 minutes. The adhesive of Sample 18 also had an excellent 72 hour peel value.

- 10 Example 11: A series of pressure-sensitive adhesive tapes were made by first partially polymerizing (according to the method of Example 8) a mixture of, by weight,
- 90 pbw of isooctyl acrylate
 - 10 pbw of acrylic acid
 - 15 0.04 pbw of 2,2-dimethoxy-2-phenylacetophenone (KB-1) (available from Sartomer) into a syrup.

Five grams of polymeric photoinitiator (Polymer I of Example 4 or Polymer II of Example 5) were added to each syrup and thoroughly mixed. The mixture was knife coated
 20 onto 40 μm poly(ethylene terephthalate) (PET) film at a thickness of 50 μm . The coating was exposed to a bank of blacklight bulbs. Each coating received an irradiated dose of 250 mJ/cm^2 , 2.4 mW/cm^2 for 104 seconds at an oxygen level of 193 ppm. The properties of various
 25 pressure-sensitive tapes are recorded in Table IV. Peel adhesion and shear holding values were measured as described in Example 8.

30

Table IV				
Polymeric photoinitiator	Wt%	Peel adhesion N/dm	Shear holding	
			25°C	70°C
Polymer I	5	68	10,000+	4890
Polymer II	5	58	10,000+	6810

35

- 39 -

The data of Table IV show that the addition of polymeric photoinitiators to partially polymerized acrylic syrups, followed by photochemically curing, provided pressure-sensitive adhesives having high performance properties.

5

Example 12: Preparation of pressure-sensitive adhesives

A series of pressure-sensitive adhesive tapes was made by partially photopolymerizing a mixture of:

- 90 pbw isooctyl acrylate (IOA)
- 10 pbw acrylic acid (AA)
- 0.04 pbw 2,2-dimethoxy-2-phenylacetophenone

The partial photopolymerization was accomplished in an inert (nitrogen) atmosphere using a bank of 40-watt fluorescent black lights to provide a coatable syrup of a viscosity of about 1500 cps. A polymeric photoinitiator (polymer III of Example 6 or polymer IV of Example 7) was added to each syrup. Each mixture was coated at a thickness of 50 μ m using a conventional knife coater onto biaxially-oriented polyethylene terephthalate film. The coated film was cured using the procedure of Example 11.

25

30

Table V				
Polymer	Parts by wt (g)	Oxygen in the chamber (ppm)	Peel adhesion N/dm	Shear values (min)
III	2	195	74	1207
III	5	197	68	4400
III	10	202	69	6808
IV	2	207	70	2005
IV	5	194	72	6452
IV	10	199	69	8426

Each of the tapes had a peel adhesion in the range of 68 to 74 N/dm (measured from glass at 180°) and a peeling

- 40 -

rate of 230 cm/min) and a 25°C shear value of up to 8426 minutes.

Example 13:

5 This example teaches the use of a methacrylamidoacetyl photoinitiator (Compound No. 2 of Example 2) in combination with a conventional photoinitiator (KB-1) and with a diacrylate additive (HDDA). Each of the following trials was prepared using
10 partially polymerized syrups described in Example 10; additional KB-1 photoinitiator (0.12 wt. %) was then dissolved in each syrup. Coating and polymerizations to high conversions, i.e., greater than 98%, were also conducted as described in Example 10, and two irradiation
15 conditions were utilized: Blacklight alone (in Trials 1-3; 250 mJ/cm² using an intensity of 2.4 mW/cm² for 147 seconds at an oxygen level of 200 ppm) and Blacklight followed by exposure to a medium pressure mercury lamp (in Trials 4-6; 70 mJ/cm² using an intensity of 16.9 mW/cm²
20 for 8 seconds). The shear holding data recorded in Table VI below was obtained using 2.54 cm x 1.27 cm (1.0" x 0.5") adhesive areas and a 500 gram load at 70°C.; the values serve as a means of differentiating the effectiveness of Compound 2 in the presence and absence of
25 diacrylate additives.

- 41 -

Table VI					
Trial No.	Compound No. 2	HDDA	Blacklight Alone Shear Time (minutes)	Blacklight + Mercury Lamp	
				Shear Times (minutes)	Peel Adhesion (N/dm)
1	0.40	--	142	10,000+	158
2	0.80	--	7584	10,000+	144
1	1.20	--	10,000+	51 p.o.*	139
4	0.05	0.10	17	434	157
5	0.10	0.10	27	10,000+	148
6	0.20	0.10	33	10,000+	157

* p.o. = pop-off failure

The data of trials 1-3 show that a concentration of about 1.20% Compound No. 2 is required for high performance shear holding capability, while the data of trials 4-6 show that the concentration of Compound No. 2 can be substantially reduced, i.e., to as little as 0.10%, when HDDA and post-Blacklight exposure to high intensity are utilized.

Example 14:

This example teaches that a high performance pressure sensitive adhesive with low percentage volatiles can result from use of Compound No. 2 of Example 2 and high intensity exposure only.

The following trials were conducted by adding 1.3 weight percent of Compound No. 2 to the monomer solution of Example 8 and exposing the solutions to Blacklight until a coatable viscosity was achieved. Resulting syrups were knife-coated onto polyester, and the coated syrups were covered with a polyester cover sheet (50 micrometers in thickness) prior to exposure to the high intensity light from a medium pressure Hg lamp.

- 42 -

Table VIII						
Trial	Total Exposure (mJ)	% Volatiles	Shear Time (minutes)	Peel Adhesion (N/dm)	I ^(a) mW/cm ²	Time sec.
1	408	11.6	--	--	16.9	24
2	816	1.2	10,000+	108	16.9	48
3	1224	1.1	10,000+	105	16.9	72
4	1632	1.0	10,000+	107	16.9	96

(a) I = intensity

Trial 1 produced an unacceptable pressure sensitive tape because of an excessive level of percent volatiles in the form of unpolymerized monomers. When the amount of high intensity radiation was increased, however, in trials 2-4 very acceptable percent volatiles and tape performances were observed.

Various modifications and alterations of this invention will become apparent to those skilled in the art without departing from the scope and spirit of this invention, and it should be understood that this invention is not to be unduly limited to the illustrative embodiments set forth herein.


- 43 -

We claim:

1. An acrylamide functional disubstituted acetyl aryl ketone.

5

2. The acrylamide functional disubstituted acetyl aryl ketone of claim 1 having the formula:

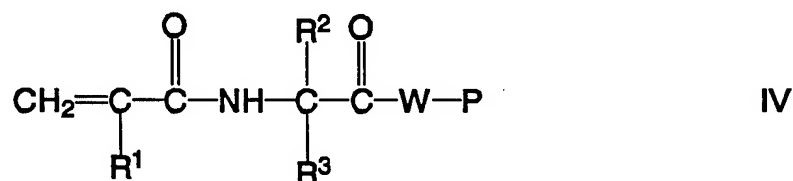

wherein

R¹ is hydrogen or methyl;

10 R² and R³ independently are an alkyl group of 1 to 14 carbon atoms, a cycloalkyl group of 3 to 14 carbon atoms, an aryl group of 5 to 12 ring atoms, an arenyl group having 6 to 16 carbon atoms, the aryl and arenyl groups up to 3
15 heteroatoms selected from S, N, and nonperoxidic O, or R² and R³ taken together with the carbon atom to which they are joined form a carbocyclic ring of 4 to 12 ring atoms;


W is -O-, -S-, or -NH- or a divalent connecting group
20 joining the carbonyl group of the acrylamidoacetyl functional group to the photosensitive group, P; and

P is a radiation sensitive aryl ketone group capable of Norrish Type I cleavage.


25

3. The acrylamide functional disubstituted acetyl aryl ketone according to claim 2 wherein W is selected from the class of connecting groups consisting of


- 44 -

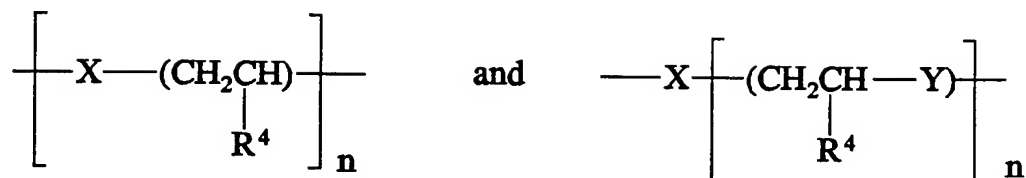

in which n is a number having a value of one to four, R⁴ is hydrogen or methyl group, X is -O-, -S-, or -NH-, and Y is selected from the group consisting of



5 wherein the radiation sensitive group P has the formula:



in which

Ar is an arylene group having 6 to 12 carbon atoms that can be substituted by a lower alkyl group having one to six carbon atoms; and

10 R⁵ is selected from the group consisting of hydrogen, C₁ to C₁₂ alkyl groups, C₁ to C₁₂ alkoxy groups, and phenyl groups;

each R⁶, R⁷, and R⁸ independently are selected from the group consisting of hydroxyl, C₁ to C₁₂ alkyl groups, C₁ to C₁₂ alkoxy groups, di(C₁ to

15

- 45 -

5 C₁₂) amino groups, and phenyl groups, provided
 that at least one of R⁶, R⁷, and R⁸ is selected
 from the group consisting of hydroxyl, C₁ to C₁₂
 alkoxy groups, or C₁ to C₁₂ amino groups, or
 10 that any two of R⁶, R⁷, R⁸ together is an
 alkylene group, -(C_pH_{2p})-, or an alkylene-dioxy
 group, -O-(C_pH_{2p})-O-, in which p is an integer
 having a value of two or three, that together
 with the carbon atoms to which they are attached
 15 form a 5- or 6- membered ring, or any two of R⁶,
 R⁷, and R⁸ taken together with the carbon atom
 to which they are attached form a carbonyl
 group,




20 provided that the remaining R⁶, R⁷, or R⁸ is
 selected from the group consisting of hydroxyl,
 C₁ to C₁₂ alkoxy groups, C₁ to C₂ amino groups,
 and aryl groups; and wherein Ar is selected from
 the group consisting of phenylene,
 naphthylenylene, and biphenylene.

25 4. A photopolymerizable composition comprising one
 or more ethylenically-unsaturated monomers and an
 acrylamide functional disubstituted acetyl aryl ketone
 photoinitiator according to any of claims 1 to 3, said
 composition optionally being polymerized.

30

5. The photopolymerized composition according to
 claim 4 which includes a polymeric photoinitiator
 comprising units having the formula

- 46 -

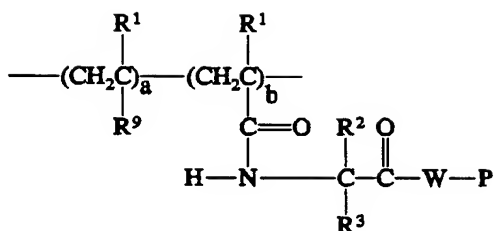

in which R^1 , R^2 , R^3 , W, and P are the same as defined above; R^9 is one or more groups as determined by the identity of the ethylenically-unsaturated monomers in the polymerizable composition; and a and b are each numbers
 5 having a value sufficient to provide to the linear polymer a number average molecular weight of from about 1000 to 5,000,000, the mole ratio, $b/(a+b)$, having a value from about 0.0001 to 0.5.

10 6. A photopolymerizable composition comprising one or more ethylenically unsaturated monomers and the polymeric photoinitiator having units according to claim 5, said photopolymerizable composition optionally being a coatable syrup.

15

7. A composition photopolymerizable to a pressure-sensitive adhesive comprising per 100 parts by weight (pbw) of

- (1) 60 to 99.95 pbw of one or more acrylic acid
 20 esters of monohydric aliphatic alcohols, said alcohols having an average of 4 to 12 carbon atoms;
- (2) 0 to 39.95 pbw of ethylenically-unsaturated monomers whose homopolymer has a glass
 25 transition temperature (T_g) greater than 50°C , and
- (3) 0.01 to 10.0 pbw, preferably 0.01 to 2.0 pbw of acrylamide functional disubstituted acetyl aryl

- 47 -

ketone photoinitiator according to any of claims 1 to 3,

- (4) 0 to 5.0 pbw, preferably 0.01 to 5.0 pbw of a polyfunctional unsaturated monomer, which preferably is hexanediol diacrylate, and
- (5) 0 to 5.0 pbw of a thermal or actinic radiation activated source of free radicals, the source being free of ethylenic unsaturation;

said composition optionally being polymerized.

8. A substrate bearing a layer of the composition according to any of claims 1 to 7.

9. A pressure sensitive adhesive tape comprising a flexible backing and on at least one surface thereof a layer of the photopolymerized composition according to any of claims 4 to 7, said pressure sensitive adhesive tape optionally further comprising a layer of a release coating.


10. A laminated article comprising the pressure-sensitive adhesive according to claim 7 applied between two substrates, wherein optionally at least one substrate is nonadherent to the pressure sensitive adhesive.

11. The process for preparing an acrylamide functional disubstituted acetyl aryl ketone according to any of claims 1 to 3 comprising the steps of

- (a) providing an admixture of 100 mole percent of a hydroxyl, thiol, or amine functional aryl ketone with from 50 to 150 mole percent of one or more disubstituted alkenyl azlactones;
- (b) maintaining the admixture at 0°C to 100°C for a sufficient time to convert the hydroxyl, thiol, or amine functional aryl ketone to an acrylamide functional disubstituted acetyl aryl ketone;

- 48 -

(c) optionally, isolating the resulting acrylamide functional disubstituted acetyl aryl ketone; said aryl ketone optionally having the formula H-W-P, wherein W and P are as defined above and the alkenyl azlactone has the formula



wherein R¹, R², and R³ are defined above; said process optionally further comprising the step of polymerizing said acrylamide functional disubstituted acetyl aryl ketone with at least one ethylenically unsaturated monomer to provide a crosslinked polymer.

12. A process for preparing the polymeric photoinitiator according to claims 5 or 6 comprising the steps of:

- a) polymerizing an alkenyl azlactone with a copolymerizable ethylenically unsaturated monomer, and
- b) reacting the resulting copolymer with a hydroxy, thiol, or amino group-substituted photoinitiator to yield said polymeric photoinitiator.

INTERNATIONAL SEARCH REPORT

Internat i Application No

PCT/US 94/10620

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C08F20/58 C07C237/22 C07C233/49 C08F2/50

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C08F C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP,A,0 379 917 (BAYER) 1 August 1990 -----	

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

24 January 1995

Date of mailing of the international search report

10. 02. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Cauwenberg, C

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 94/10620

Patent document
cited in search report

Publication
date

Patent family
member(s)

Publication
date

EP-A-0379917

01-08-90

US-A-

5274167

28-12-93